


	f1	f2	f3	f4	f5
KFL.7777	100%	98%		85%	
KFL.6666			100%		
KFL.8888		2%		15%	100%

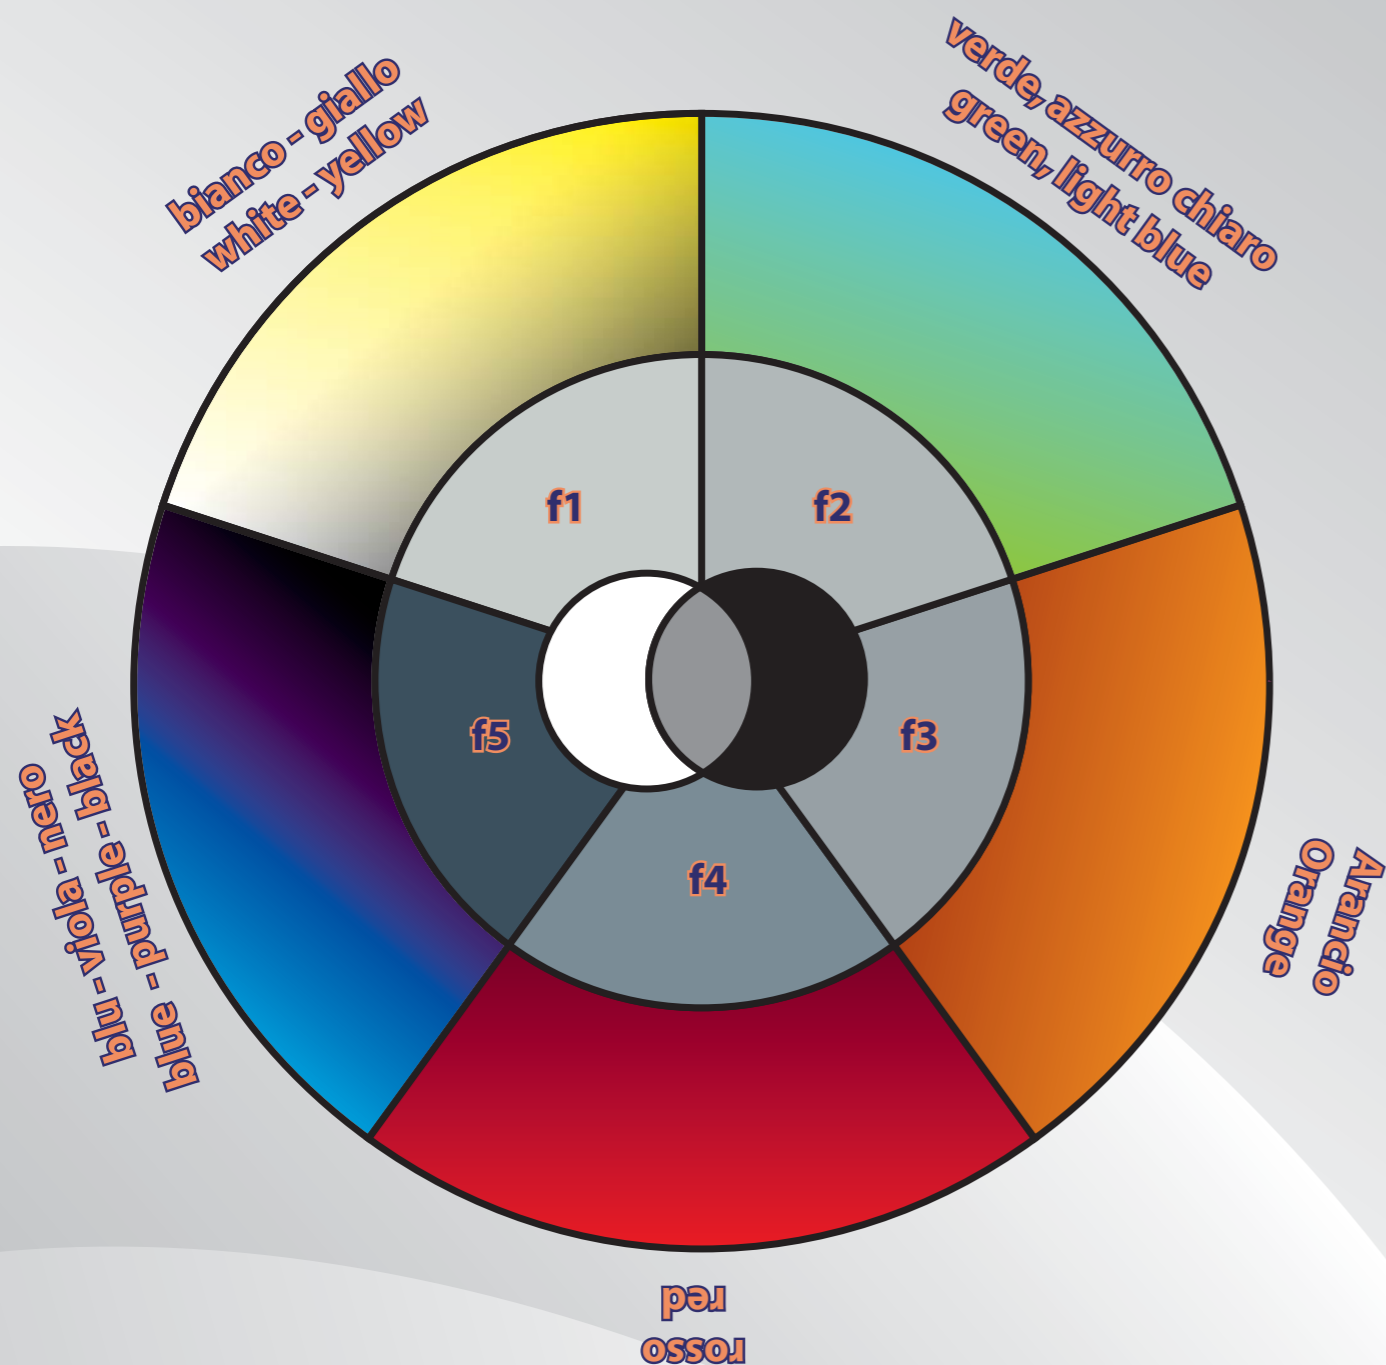


IVAT

Coatings

GROUND FILLER

*New Generation HS Acrylic Primer
for car refinish, trucks and marine*

Shade Mix

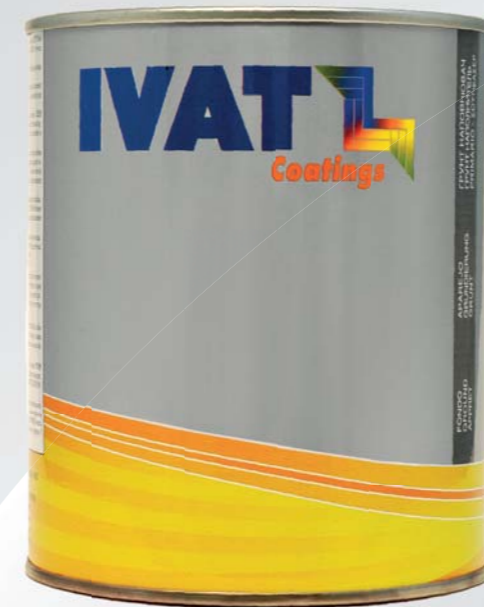

DEGRADAZIONI DI GRIGIO
Possibilità di ottenere toni di grigio per la migliore realizzazione del punto tinta

SHADES OF GRAY
It can be coloured to reach any shade of gray in order to increase the coverage of the finish or of the basecoat

IVAT
Coatings

INDUSTRIE VERNICI ALTO TEVERE s.r.l. Via Dagnano, 20/22 - 52036 Pieve Santo Stefano - Arezzo (Italy)
Tel. ++39 0575 798 069 - Fax ++39 0575 798 188 e-mail: info@ivatcoatings.com, www.ivatcoatings.com

Altissimo solido
Facile applicazione
Ultra carteggiabile

Rapida essiccazione
Assenza di calo
Ultra coprente

Ultra high solid
Easy application
Extra easy sanding

Very fast drying
No sinkage
High covering power

VOC 2004 / 42 / II b (c) (540) 540


Adatto per cicli ad acqua e solvente - Suitable for water and solvent paint

SUPPORTI

- Vecchie verniciature a due componenti
- Alluminio carteggiato
- Vetrosina
- Plastiche dure
- Legno
- Lamiera zincata

SURFACES


- 2k old paintings
- Sanded aluminium
- Fiberglass
- Hard plastics
- Wood
- Galvanized sheets

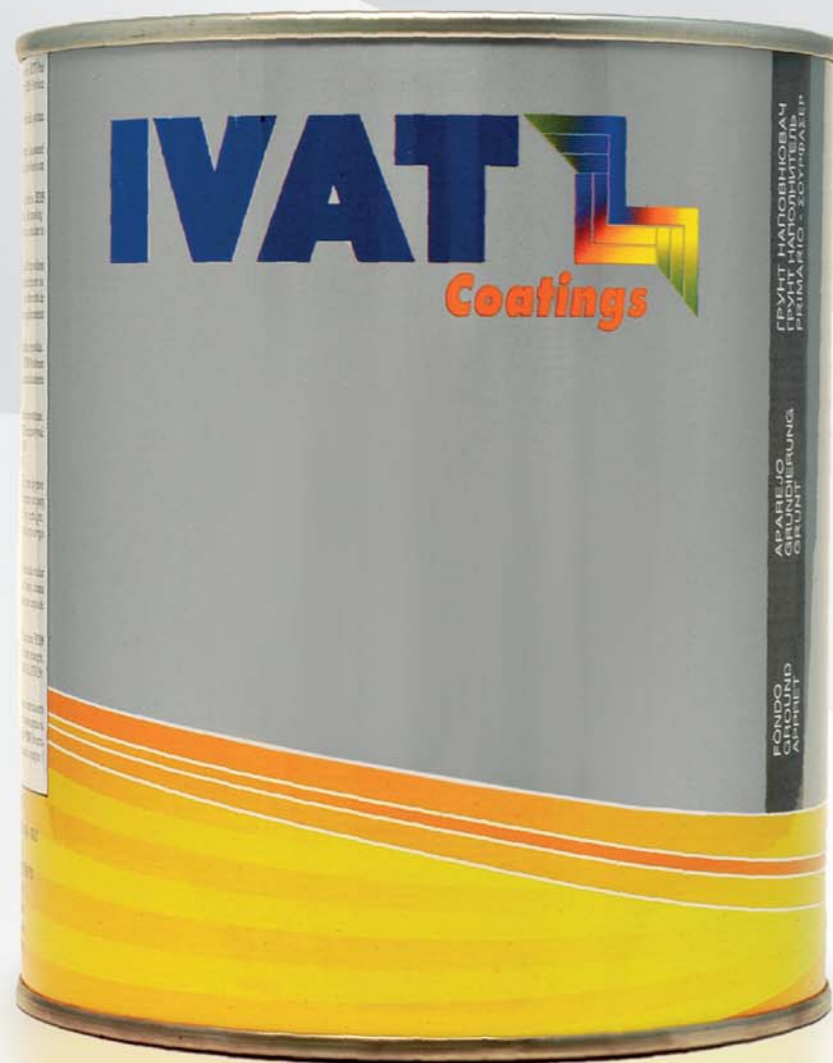


KFL.7777 Ground filler 5+1 light grey

KFL.6666 Ground filler 5+1 medium grey

KFL.8888 Ground filler 5+1 dark grey

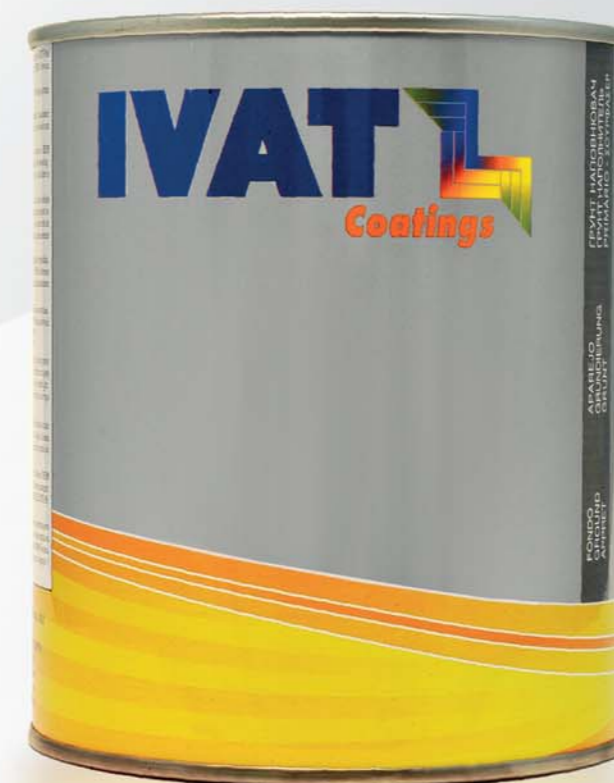


INFORMAZIONI TECNICHE - TECHNICAL FEATURES



Ground filler
Trimeton FK9.7777
FK9.6666



Diluizione
10% - 20%
RDL.F888
RDL.S777
RDL.L666



5'-10' 20°C



3h 20°C
30' 60°C



15' 70cm



P320-P400-P500

